



HELPI SRL

Mobile 340 25 111 34 Fax 035 78.44.07 email : gambirasio@helpi.biz

AUTOMATIC PACKAGING MACHINE MA96 + TU 66/130

Packaging line composed by:

- **AUTOMATIC WRAPPER MA96**
- **SHRINK TUNNEL TU 66/130**





Packaging machine MA96:

Packaging machine MA96 with right angle sealing bar, suitable for any type of single folded plastic film (polyolefins, polypropylene, polyethylene, PVC)

- Infeed belt with electrically adjustable position, according to the width of the product to be packed.
- Conveyor belts at set speed 19 Mt./min.
- Angular steel sealing bar, 900 x 680 mm, max raising. 200 mm; pneumatically operated; sealing bar height regulation motor-powered.
- Adjustable temperature and sealing bar descent time.
- Offcut winding unit gearmotor operated.
- Max size of folded film reel: Width 700 mm, external diameter 250 mm, max film thickness: 40 micron.
- Production 6-15 packs per minute, depending on sizes and types of product.
- Frame on adjustable feet.
- Installed electric power 3,5 kW (three phases + earth).
- Standard work height 850 mm.
- Weight: about 650 Kg.






Shrink tunnel TU66/130:


Shrink tunnel, length 1300 mm.

- Motor driven conveyor belt with silicon rubber covered rollers.
- Tunnel passage L.660 x H.260 mm.
- Adjustable temperature until 240°C.
- Frame on adjustable feet.
- Electrical power installed: 13 kW (three phases + earth).
- Standard work height 850 mm.
- Weight: about 430 Kg.

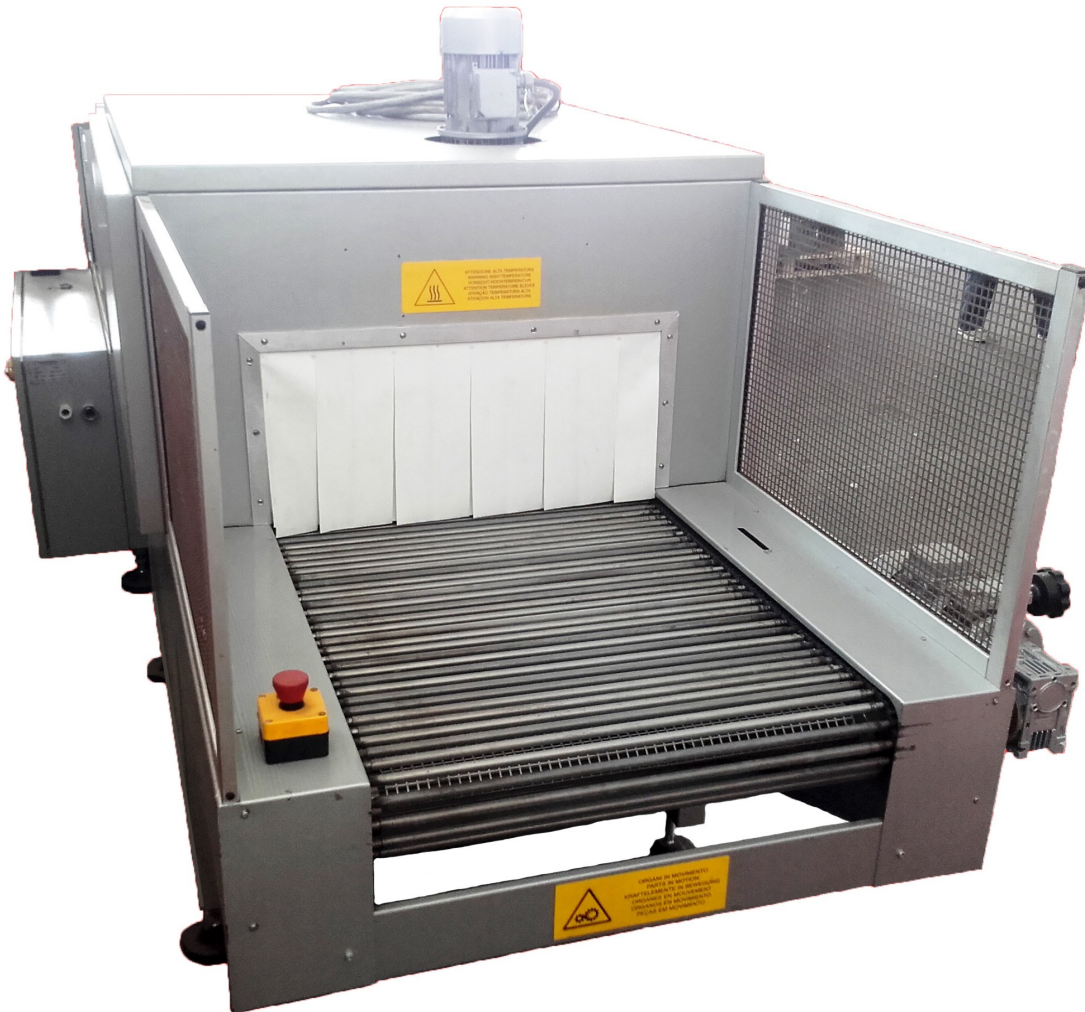



Layout MA96 + TU66/130:

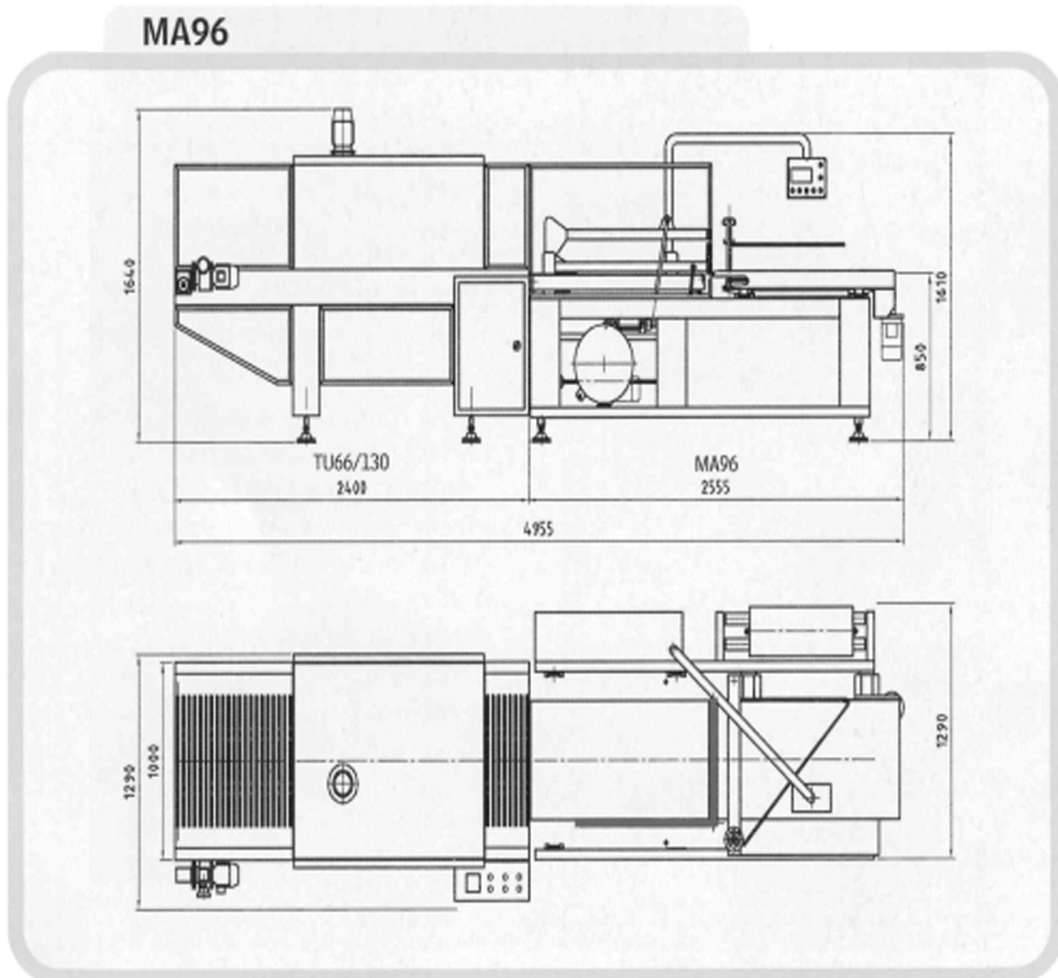

Quote in mm

Contenuto senza impegno, non costituisce documento contrattuale

Dimensions in mm

This information is subject to change without notice