



# HELPI SRL

Mobile 333 9953049

Fax 035 78.44.07

email: [gambirasio@helpi.biz](mailto:gambirasio@helpi.biz)

## **L-SEALING PACKAGING MACHINE FOR USE WITH FOLDED FILM Model: MP75NP – Vacuum Pump S.p.A.**





## L-Sealing Packaging machine (folded film) MP75NP:

Automatic packaging machine **MP75NP**, electropneumatically operating, it's suitable for packaging any kind of product, with any type of single-folded shrink film.

- Processing cycle control with operating panel.
- Angular sealing bar: 750x500 mm with pneumatic motion (air consumption 2,5 litres per cycle; operating pressure: 6 BARs, air compressor excluded).
- Usable single-folded film types: polyethylene (25-50 micron), PVC (20-50 micron), polypropylene (15-40 micron).
- Film reel max. dimensions: width 600 mm, diameter 300 mm.
- Package max. dimensions: mm (750-H) x (500-H) x (Max. Height mm 150/200).
- Unloading conveyor belt to replace the work surface, fixed speed 8,5 mt/min.
- Shrink tunnel: lenght 800 mm, tunnel's passage 500 x 300 mm.
- Tunnel conveyor speed adjustable with motovariator from 1,6 to 8,2 mt/min.
- Tunnel conveyor with rollers coated with silicon rubber, width 500 mm.
- Tunnel temperature adjustable up to 200°C.
- Cooling group at the tunnel exit.
- Production: up to 500 packs/hour, according to the product and the package sizes.
- Installed electric power: 9 kW – 18 A (three phases + earth).
- Standard work height: 805 mm.
- Weight: 360 Kg.






# HELPI SRL

Mobile 333 9953049

Fax 035 78.44.07

email: [gambirasio@helpi.biz](mailto:gambirasio@helpi.biz)

## Layout MP75NP:

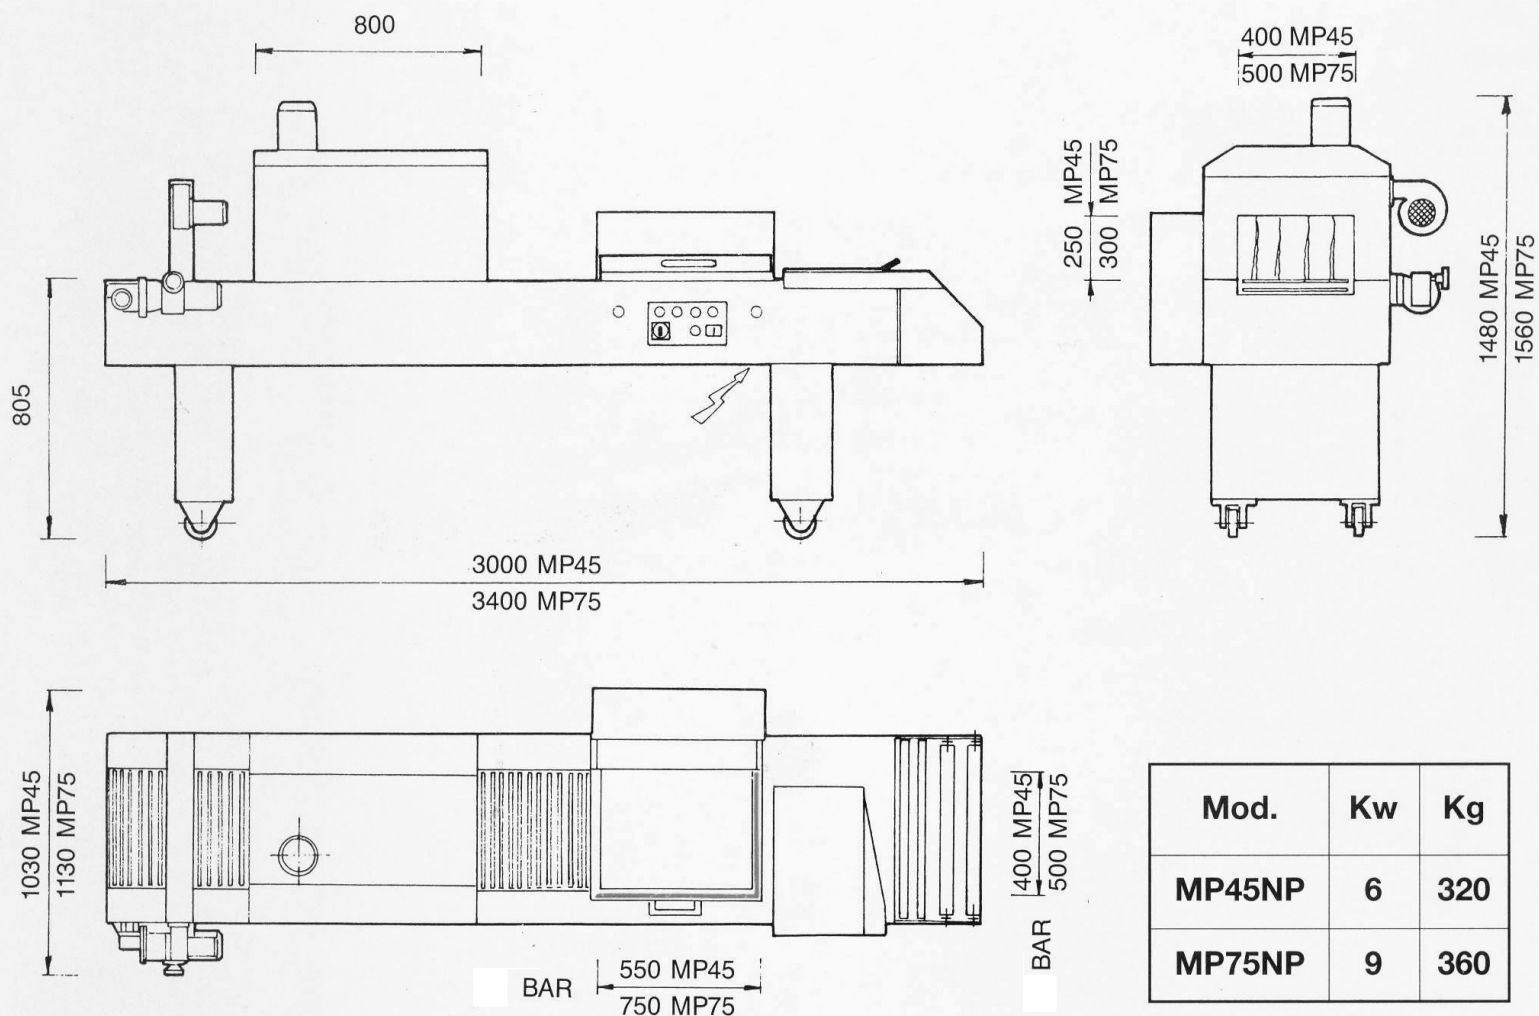

• Dimensions in mm